








Model :	3191BG
Size :	0.39-inch
Emitting color :	Yellow-Green
Mode :	Common-Anode (CA)
Digit :	1-Digit
Category :	LED 7-Segment Display
Maker :	XLITX Technology

Prices : \$0.62 = 100 Pieces \$0.29 = 500 Pieces \$0.25 = 1000 Pieces (Free shipping)






Dimension & Diagram

Type-I

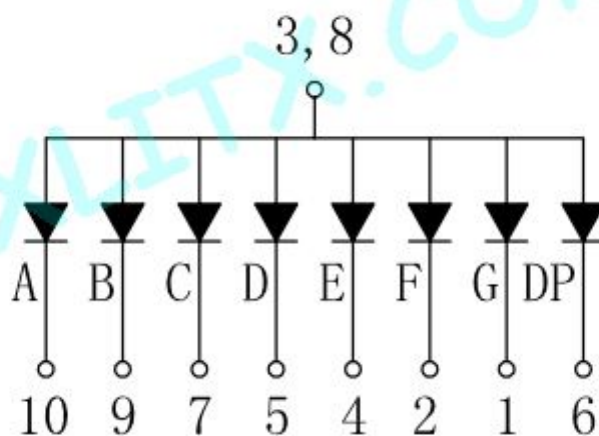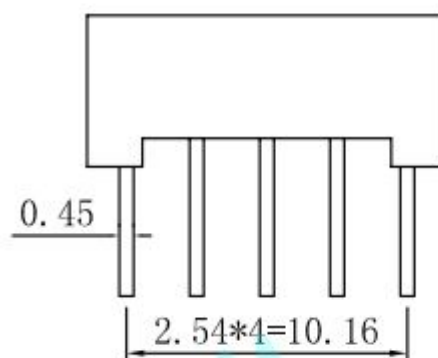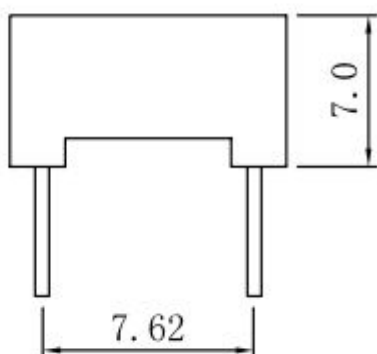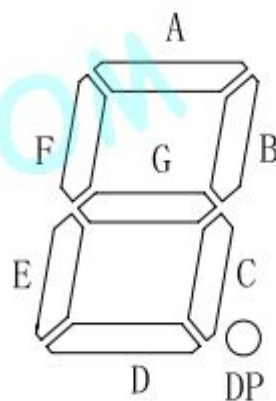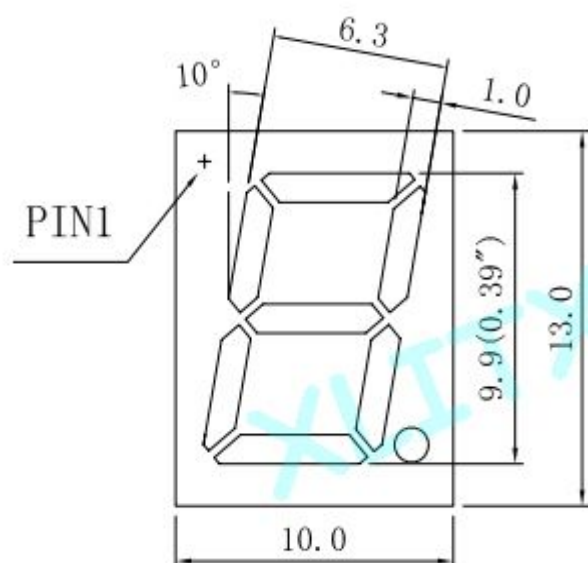

Dimension & Diagram

Type-II

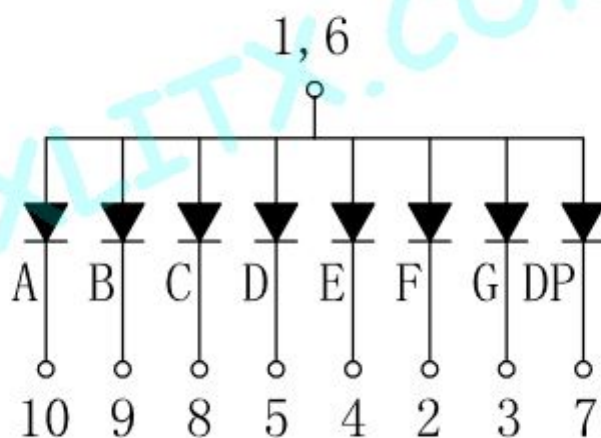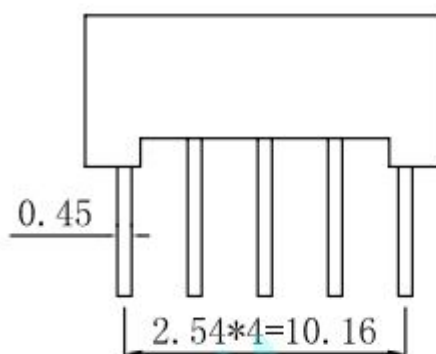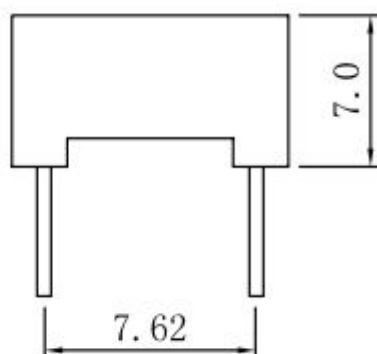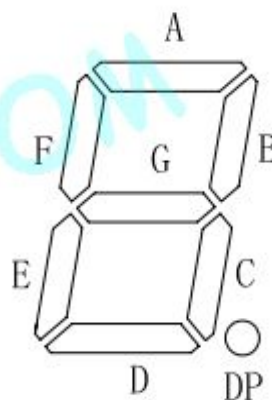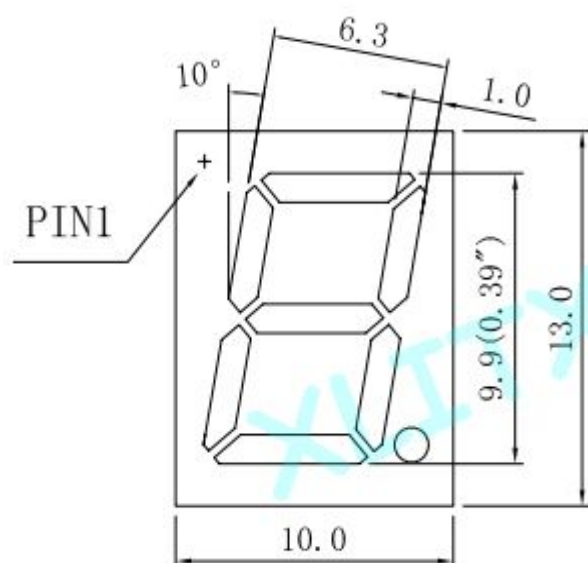

Yellow-Green Electro-Optical Parameter

1. Electro-Optical Characteristics(Ta=25℃)

PARAMETER	SYMBOL	DEVICES (Yellow-Green)		UNIT	TEST CONDIONS
		TYP	MAX		
Peak Emission Wavelengrth	λ_p	565		nm	IF=10mA
Forward Voltage	VF	2.2		V	IF=10mA
Reverse Current	IR		50	μ A	VR=5V
Segment To Segment (Dot To Dot) Luminonous Intensity Ratio	IV-M	1.5:1			IF=20

2. Absolute Maximun Ratings(Ta=25℃)

PARAMETER	SYMBOL	DEVICES (Yellow-Green)	UNIT
Power Dissipation Per Dice	pad	70	mw
Derating Linear From 25℃ Per Dice		0.27	mA/℃
Continuous Forward Current Per Dice	Iaf	25	mA
Peak Forward Ourrent Per Dice (Duty Cycle 1/10,10KHz)	Ipf	90	mA
Reverse Voltage Per Dice	Vr	5	V
Operating Temperature	Topr	-20℃ (to) +75℃	
Storage Temperature	Tstg	-20℃ (to) +85℃	
Solder Temperature		1.6 Inch Below Seating Place for 5 seconds at 230℃	

3. Electro-Optical Curve

