

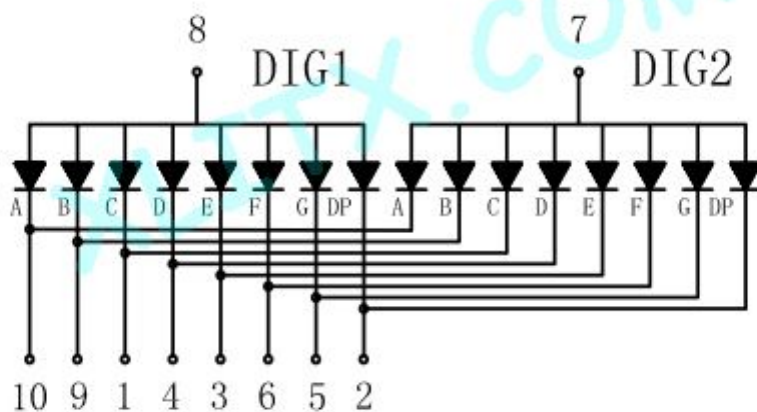


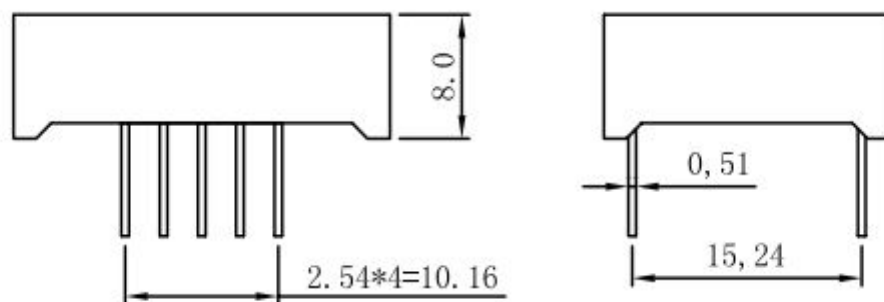

|                         |                       |
|-------------------------|-----------------------|
| <b>Model :</b>          | 5261BW                |
| <b>Size :</b>           | 0.56-inch             |
| <b>Emitting color :</b> | White                 |
| <b>Mode :</b>           | Common-Anode (CA)     |
| <b>Digit :</b>          | 2-Digit               |
| <b>Category :</b>       | LED 7-Segment Display |
| <b>Maker :</b>          | XLITX Technology      |

**Prices :**    \$0.78 = 100 Pieces    \$0.63 = 500 Pieces    \$0.60 = 1000 Pieces    (Free shipping)

## Dimension & Diagram

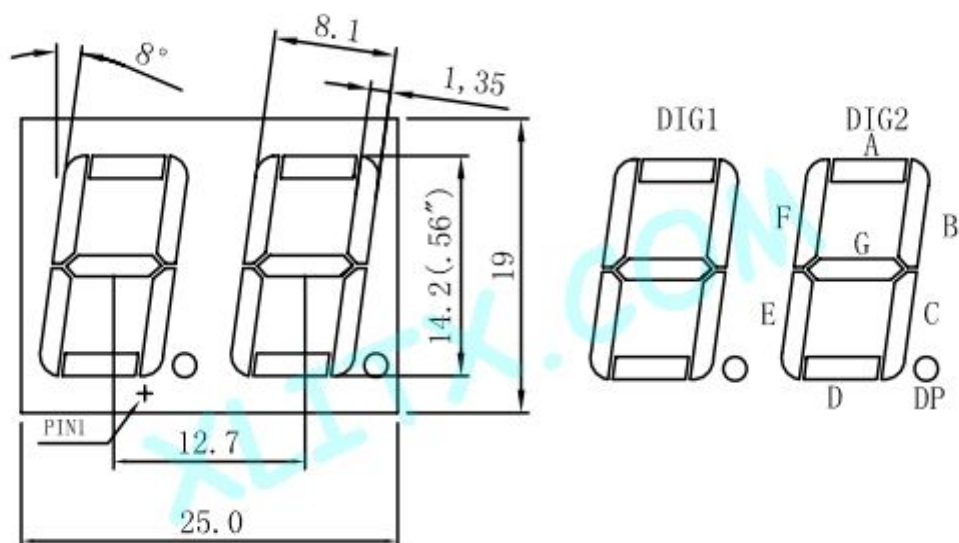

## White Electro-Optical Parameter

### 1. Electro-Optical Characteristics(Ta=25°C)

| PARAMETER                                                     | SYMBOL      | DEVICES<br>( White ) |     | UNIT    | TEST CONDIONS |
|---------------------------------------------------------------|-------------|----------------------|-----|---------|---------------|
|                                                               |             | TYP                  | MAX |         |               |
| Peak Emission Wavelengrth                                     | $\lambda_p$ | 470                  |     | nm      | IF=10mA       |
| Forward Voltage                                               | VF          | 3.5                  |     | V       | IF=10mA       |
| Reverse Current                                               | IR          |                      | 50  | $\mu$ A | VR=5V         |
| Segment To Segment (Dot To Dot)<br>Luminonous Intensity Ratio | IV-M        | 1.5:1                |     |         | IF=20         |

### 2. Absolute Maximun Ratings(Ta=25°C)

| PARAMETER                                                | SYMBOL | DEVICES<br>( White )                                   | UNIT  |
|----------------------------------------------------------|--------|--------------------------------------------------------|-------|
| Power Dissipation Per Dice                               | pad    | 70                                                     | mw    |
| Derating Linear From 25°C Per Dice                       |        | 0.27                                                   | mA/°C |
| Continuous Forward Current Per Dice                      | Iaf    | 30                                                     | mA    |
| Peak Forward Ourrent Per Dice<br>(Duty Cycle 1/10,10KHz) | Ipf    | 100                                                    | mA    |
| Reverse Voltage Per Dice                                 | Vr     | 5                                                      | V     |
| Operating Temperature                                    | Topr   | -20°C (to) +75°C                                       |       |
| Storage Temperature                                      | Tstg   | -20°C (to) +85°C                                       |       |
| Solder Temperature                                       |        | 1.6 Inch Below Seating Place for<br>5 seconds at 230°C |       |

### 3. Electro-Optical Curve

