




|                         |                       |
|-------------------------|-----------------------|
| <b>Model :</b>          | 18101AGG              |
| <b>Size :</b>           | 1.80-inch             |
| <b>Emitting color :</b> | Green                 |
| <b>Mode :</b>           | Common-Cathode (CC)   |
| <b>Digit :</b>          | 1-Digit               |
| <b>Category :</b>       | LED 7-Segment Display |
| <b>Maker :</b>          | XLITX Technology      |

**Prices :**    \$1.93 = 50 Pieces    \$1.05 = 300 Pieces    \$1.01 = 600 Pieces    (Free shipping)

## Dimension & Diagram

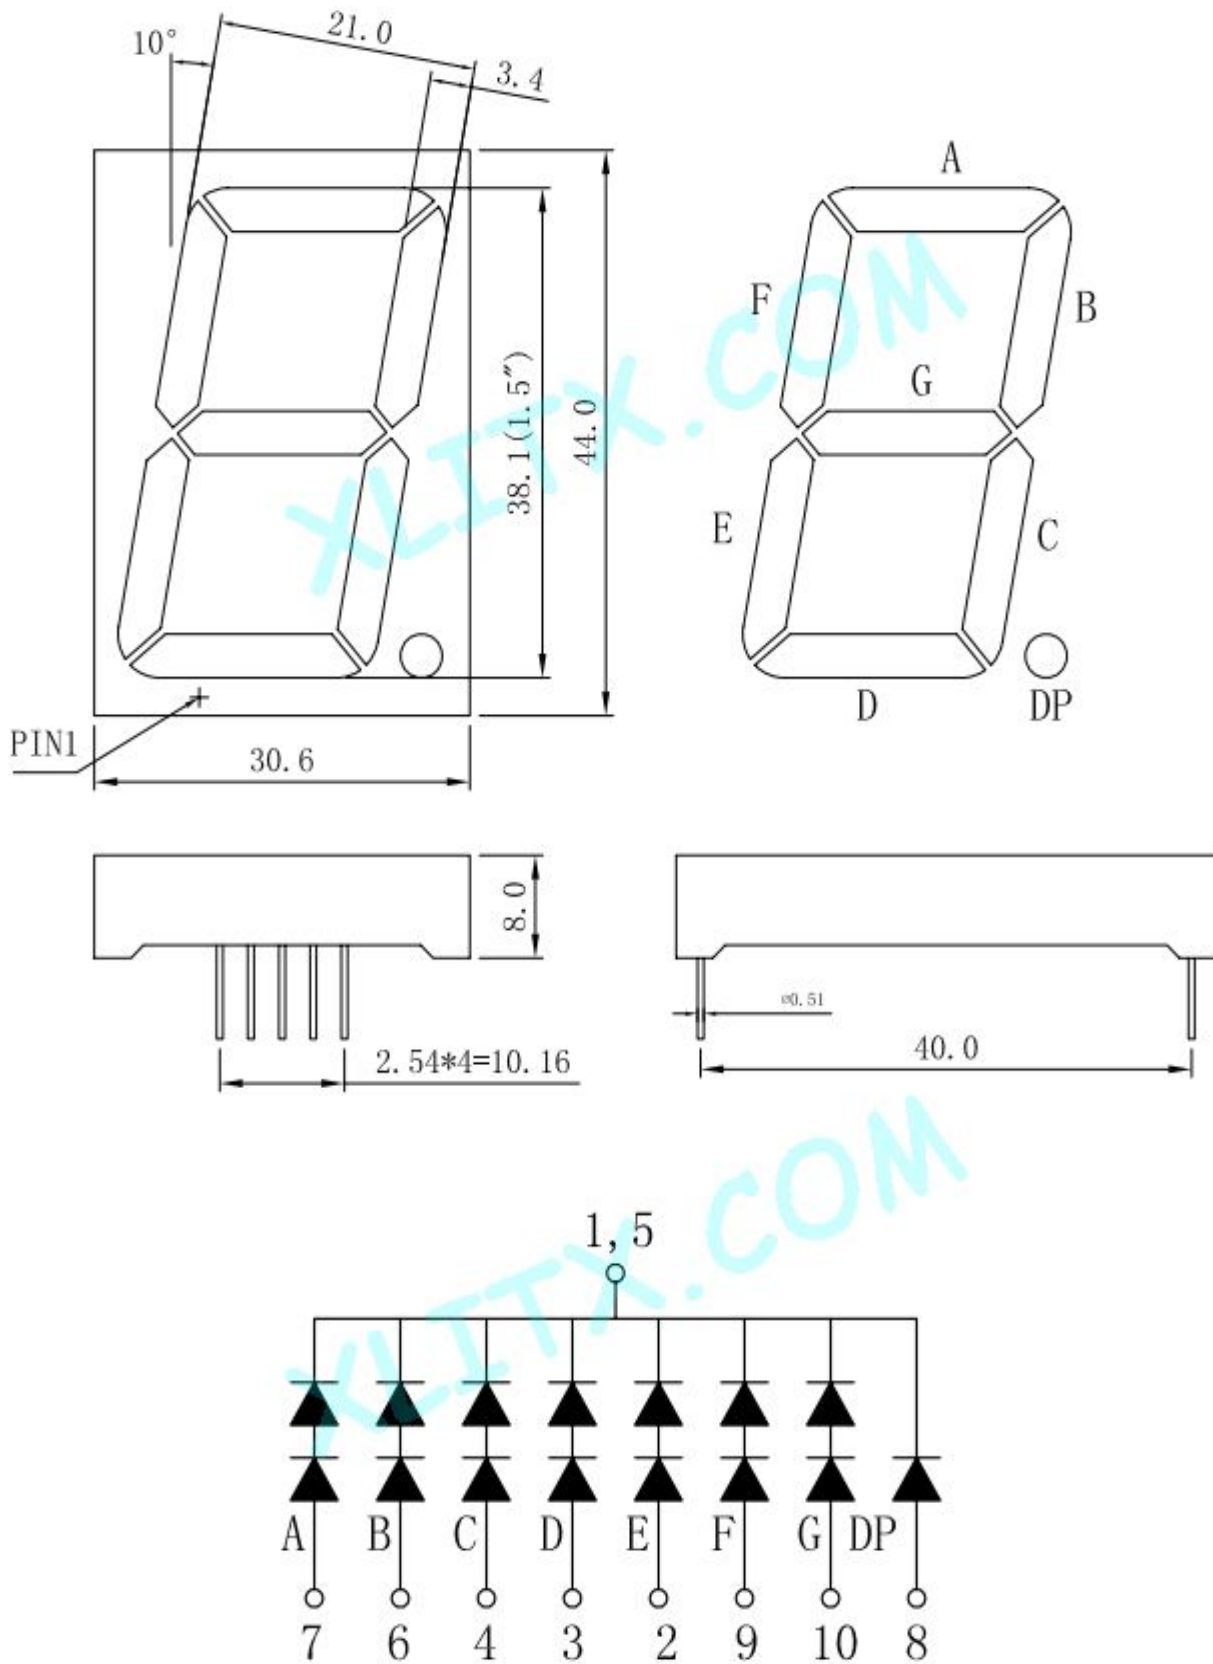

## Green Electro-Optical Parameter

### 1. Electro-Optical Characteristics(Ta=25°C)


| PARAMETER                                                     | SYMBOL      | DEVICES<br>( Green ) |     | UNIT    | TEST CONDIONS |
|---------------------------------------------------------------|-------------|----------------------|-----|---------|---------------|
|                                                               |             | TYP                  | MAX |         |               |
| Peak Emission Wavelengrth                                     | $\lambda_p$ | 525                  |     | nm      | IF=10mA       |
| Forward Voltage                                               | VF          | 3.5                  |     | V       | IF=10mA       |
| Reverse Current                                               | IR          |                      | 50  | $\mu$ A | VR=5V         |
| Segment To Segment (Dot To Dot)<br>Luminonous Intensity Ratio | IV-M        | 1.5:1                |     |         | IF=20         |

### 2. Absolute Maximun Ratings(Ta=25°C)


| PARAMETER                                                | SYMBOL | DEVICES<br>( Green )                                   | UNIT  |
|----------------------------------------------------------|--------|--------------------------------------------------------|-------|
| Power Dissipation Per Dice                               | pad    | 52.5                                                   | mw    |
| Derating Linear From 25°C Per Dice                       |        | 0.27                                                   | mA/°C |
| Continuous Forward Current Per Dice                      | laf    | 25                                                     | mA    |
| Peak Forward Ourrent Per Dice<br>(Duty Cycle 1/10,10KHz) | lpf    | 80                                                     | mA    |
| Reverse Voltage Per Dice                                 | Vr     | 5                                                      | V     |
| Operating Temperature                                    | Topr   | -20°C (to) +75°C                                       |       |
| Storage Temperature                                      | Tstg   | -20°C (to) +85°C                                       |       |
| Solder Temperature                                       |        | 1.6 Inch Below Seating Place for<br>5 seconds at 230°C |       |

### 3. Electro-Optical Curve


相对亮度与波长 RELATIVE INTENSITY VS WAVELENGTH

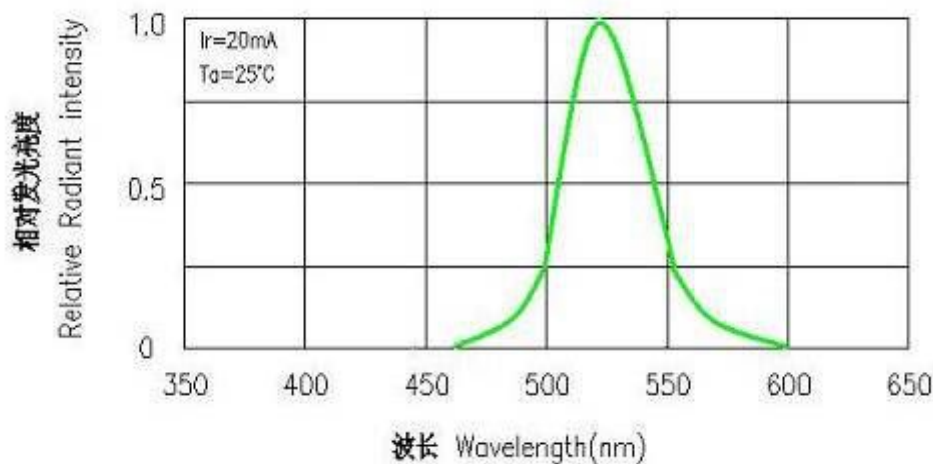


顺电流-顺电压特性  
FORWARD CURRENT VS FORWARD VOLTAGE

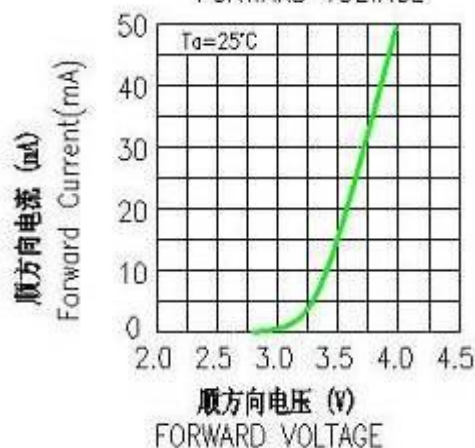

相对光度-顺电流特性  
LUMINOUS INTENSITY VS FORWARD CURRENT

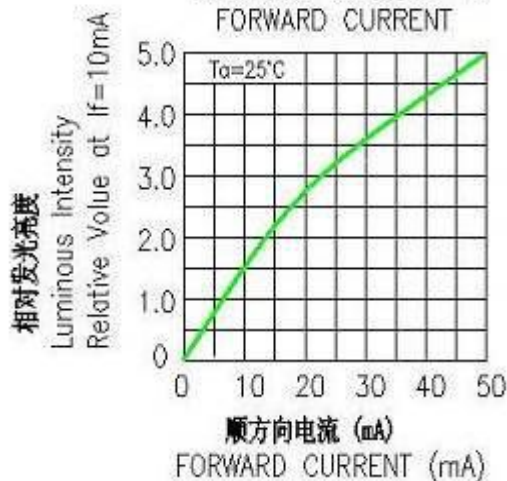

允许顺电流-周围温度特性  
ALLOWABLE FORWARD CURRENT  
AMBIENT TEMPERATURE

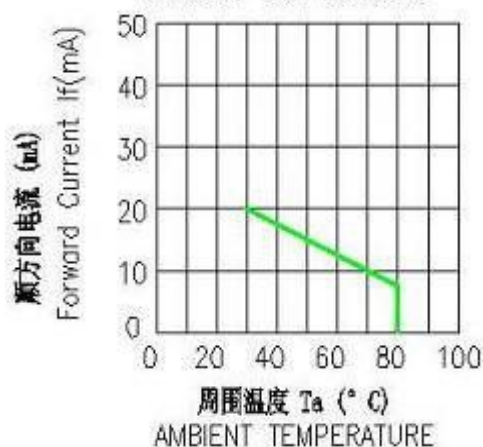

相对光度-周围温度特性  
LUMINOUS INTENSITY VS AMBIENT TEMPERATURE

